


ECONOCASER

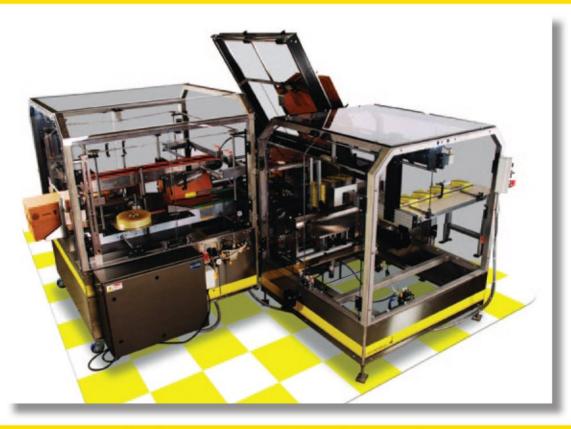

Simple, Compact, Horizontal Casepacker

The ECONOCASER is a horizontal casepacker of rugged construction that handles corrugated or folding board materials in a variety of case styles. Simple, economical design and operation are features of this machine.

Method of Operation:


Master shipping cases are automatically pulled from the supply magazine and erected onto a single load station. Product may then be manually or automatically (optional) loaded. Following loading, the machine cycle is initiated and the loaded case is transported to the closure section for either glue or tape closure.

Machine features include:

- Heavy duty construction
- Caster mounting
- Single load station (optional auto loading)
- Pressure sensitive tape or hot melt closure

Accommodates:

- Corrugated and folding board materials
- RSC Styles
- Full flap, economy flap and butting end flap constructions

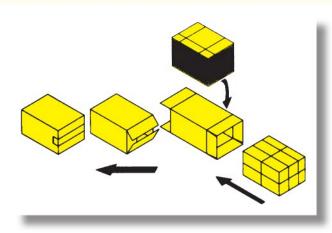

ECONOCASER:




1. Case is automatically erected



Back dust flaps are closed prior to product loading.



Single product load station.
 Optional product collating/loading feature available.



4. Pressure sensitive tape closure.



5. Hot melt glue closure.

PRIDUCT LDAD DISCHARGE 53.0 CARTON AT LOAD AT LOAD AT LOAD PRIDUCT LDAD DISCHARGE 53.0 C13403 T1.5 C28773 R8.5 122441

ECONOCASER ENGINEERING DETAILS

Size Range: (Carton/Case Size)

Min. 8" x 6" x 4" (203 x 152 x 102mm) Max. 24" x 16" x 18" (609 x 406 x 457mm)

Speed: Up to 600 cartons per hour depending

on case size and other factors.

Electrical: 220 volts 50/60 Hz, Single Phase.

Air: 80 psi (5.5 bar). Volume consumption

3.5 CFM, 18.7 SCFM (100 liters/min).

Shipping: Normally less than 1900 lbs. (860kg)

Machines available to handle carton sizes outside of range listed above quoted on request. Note: All dimensions are approximate. Subject to change.





THE SINGLE SOURCE FOR YOUR

END-OF-LINE

PACKAGING, MARKING AND CODING NEEDS

150 WILLIAM ST. PERTH AMBOY, NJ 08861 / TOLL FREE: 800-298-8936 / PHONE: 732-324-0800 / FAX: 732-324-4488